

For The Builder...

When should I buy my kit?


In time to receive it during framing of the house, after the roof is on, but before sheet rock has been applied.

Please allow three weeks for delivery.

Which kit should I order?

1. You must decide if the hinges should be on the left or on the right as you look into the mirror.
2. The standard kit is used when standard framing is used in the house. A standard wall is framed with a baseplate, a 92 5/8" stud and a double cap plate for a total height of 97 1/8".
3. The standard kit is also used in all walls higher than a standard eight foot wall.
4. It is common practice in Florida and perhaps elsewhere to use a single cap plate and to place ceiling joists across the top course of a cinder block wall. This results in a ceiling height greater than 95 5/8", but less than 97 1/8". If your home is to have block walls with a single rather than double cap plate, you should order the single cap plate kit.

Which Kit For Your Wall?

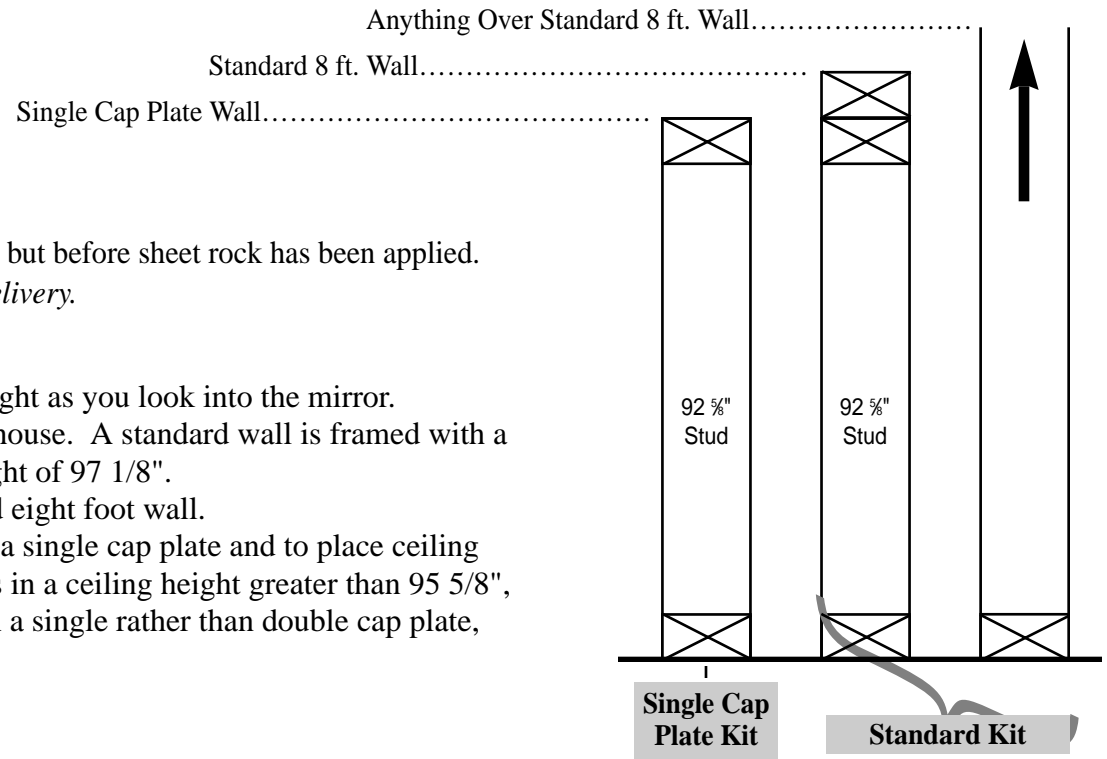

Crate 1 Contains Framing Components And Phase I Instructions. Framing (Phase I) Should Be Performed After The Roof Is On And Before Sheet Rock Is Hung. Ask Your Retailer For A Comprehensive Instructional Video.

Crates 2 & 3 Contain Mirrored Components And ***Should Not*** Be Carried To The Job Site Until Called For In The Instructions.

The other side of this sheet contains information for the framer. After you have selected either the standard or single cap plate kit, circle the appropriate rough opening information at the top of the page and provide this to your framer.